


1 2 3 4 5 6 7 8 9

F

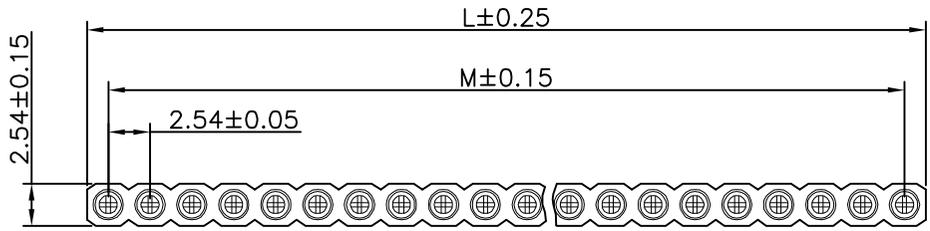


Specifications
 Current Rating:3A
 Contact Resistance:10mΩMax.
 Dielectric Withstanding Voltage:1000V RMS
 Mating pins: Outside Diameter 0.40 to 0.66 mm
 Forces: (polished steel gauge 0.46 mm)
 Insertion:2.5 N typ.
 Withdrawal:0.7N typ.
 Operating Temperature:-60°C to +85°C
 Materials
 Contact Material:Brass
 Contact clip(4 finger):Berylliumcopper (C17200)
 Insulator Material: UL 94V-0 PPS
 All materials must meet GREENCONN
 hazardous substances control standards.

No. of PIN/ROW	M	L
01	0	2.34
02	2.54	4.88
03	5.08	7.42
04	7.62	9.96
05	10.16	12.50
06	12.70	15.04
07	15.24	17.58
08	17.78	20.12
09	20.32	22.66
10	22.86	25.20
11	25.40	27.74
12	27.94	30.28
13	30.48	32.82
14	33.02	35.36
15	35.56	37.90
16	38.10	40.44
17	40.64	42.98
18	43.18	45.52
19	45.72	48.06
20	48.26	50.60
21	50.80	53.14
22	53.34	55.68
23	55.88	58.22
24	58.42	60.76
25	60.96	63.30
26	63.50	65.84
27	66.04	68.38
28	68.58	70.92
29	71.12	73.46
30	73.66	76.00
31	76.20	78.54
32	78.74	81.08
33	81.28	83.62
34	83.82	86.16
35	86.36	88.70
36	88.90	91.24
37	91.44	93.78
38	93.98	96.32
39	96.52	98.86
40	99.06	101.6

E

D

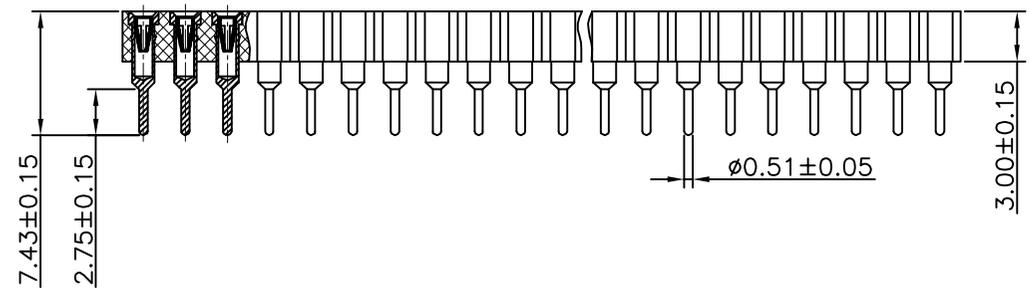

C

B

Ordering Information

CKHA123 - XX XX A 011 S X B X

No. Of Pins Per Row
01~40

Standard Plating
01=Tin
02=Gold Flash
05=Gold Flash/Tin
64=Gold 3u"/Tin

Color
1=Black

Standard Packing
N=PE Bag
C=Tube

A

Website:www.greenconn.com
E-mail:sales@greenconn.com

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.38
.X*±3.0°	.X±0.30
.XX*±2.0°	.XX±0.25
.XXX*±1.0°	.XXX±0.20

DESIGNED: / DATE: /
 CHECKED: / DATE: /
 APPROVED: / DATE: /

DWG. NO. CKHA123-CA011SB
 PART NO. CKHA123-XXXXA011SBX

TITLE. 2.54mm SIP Socket
 H=3.00mm DIP type 进口爪

AV

1 2 3 4 5 6 7 8 9